

**MASTER
QUALITY**

**PRODUCT
CATALOGUE
2022 EDITION III**

THE MANUFACTURER OF
EXTERNAL STEEL DOORS





**MASTER
QUALITY**

Beauty and class

The SETTO external door brand is a combination of beauty and class, designed from the scratch, that has been offered to the most demanding customers for over 24 years. The high aesthetic standards, functionality and user safety of SETTO doors are a priority to which the visions and actions of our leaders, designers and contractors are addressed.

We create with people in mind

We create with people, their ideas and their needs in mind. The extensive range includes ideas that harmonise with architectural designs, at attractive prices. We attach great importance to the materials of SETTO brand doors, focusing also on useful and aesthetic details. Accessories such as fanlights, door handles, handrails, door thresholds, lock inserts or INOX door appliques embellish the doors, adding even more class and beauty to the overall look.

Security and peace of mind

The peace of mind of our customers in the broadest sense, their security and satisfaction are fully in line with our offer, which includes **external steel doors** and **burglar-proof doors** for use in flats, houses, industrial and public buildings. They provide effective protection against threats. In 2022, we extended our range of doors with increased burglary resistance of the RC3 class with the Sicuro 68 RC3 44 dB **NEW** collection. These are 5 solid leaf models with appliques mounted on the outside and inside of the door.

The quality of the products from which SETTO brand doors are made ensure their functionality and durability for many years. They are moisture- and weather-resistant and, as a result, corrosion-resistant, robust, in a modern design, meeting the needs of demanding customers whose concern for comfort, family safety and sense of taste will be satisfied.

The SETTO external doors available in the current range are not all we have to offer. Our designers, employees and collaborators are already preparing further solutions to meet customer expectations, reinforcing the brand's image as competitive in the market in terms of quality and price.

LIST OF CONTENTS

- 3** SICURO 68 RC3 44 dB **NEW**
external interior door
68 mm thick
- 6** GRANDE PLUS
single-leaf, flat
68 mm thick
- 17** GRANDE 68
single-leaf, embossed
68 mm thick
- 19** GRANDE 68 FLAT
single-leaf, flat
68 mm thick
- 26** MODERN
single-leaf, embossed
56 mm thick
- 28** CLASSICO
single-leaf, flat
56 mm thick
- 32** J-TYANIUM
single-leaf, embossed
56 mm thick
- 35** GLAZING **NEW**
COLOUR SCHEME
- 36** FANLIGHTS
termo | solido
- 38** ECO-TECHNIC
technical system
41 mm thick
- 40** HARDWARE
AT EXTRA CHARGE

The attention to detail

The attention to detail is also expressed in the sonorous names of the SETTO collection: SICURO 68 RC3 44 dB, GRANDE PLUS, GRANDE 68, GRANDE 68 FLAT, MODERN, CLASSICO, J-TYANIUM, ECO-TECHNIC. These include single-leaf doors (solid and glazed, with milk glass, mirrored glass, brown reflex glass, clear glass on special order, and graphite glass **NEW**, black and P4 class **NEW**, in 56 mm and 68 mm thicknesses) and technical system doors for use in companies, warehouses, markets, basements of detached houses, etc. Manufactured in interesting choice of colours, that are appropriate to the designed building, such as golden oak, anthracite, walnut, white, wenge, Winchester and mahogany.

SICURO 68 RC3 44 dB

EXTERNAL INTERIOR DOOR

RC3 BURGLAR-RESISTANT

NEW

SICURO 68 RC3 44 dB (68 mm) TECHNICAL DATA OF THE DOOR LEAF

LEAF	weight of a solid leaf in kg for 90 cm	55
	thickness in mm	68 ± 1
	filling	wool
	leaf thickness in mm	0,7
	type of coating	PVC veneer
	anti-balance bolts	3 pcs.
	rebate (rabbet)	4-sided
	rebate thickness in mm	15
	groove thickness in mm	53
	sound insulation	44 dB
HINGES	type	tri-partite
	coating	white zinc
	hinge class	7
	number of hinges	3
LOCK	5-point slatted hooked	



LEAF THICKNESS:

68 mm



LEAF WIDTH:

80N
90 cm



44 dB
SOUND
INSULATION



POSSIBILITY
OF SHORTENING
7 cm

45 to 7 cm **SHORTENING**
for an additional charge



GOLD OAK WALNUT ANTHRACITE

SICURO 68 RC3 44 dB (68 mm)

Size	Clear opening width (cm)	Clear opening height (cm)	Door width with frame (cm)	Door height with frame (cm)	Width of wall opening (cm)	Height of wall opening (cm)
80N	77,8	198	87,9	204,5	90	205,5
90	90	200	100	207	102	208

dimensions of the metal frame

MODELS WITH YOUR CHOICE OF INOX OR NERO APPLIQUES



SOLID SICURO 68

SOLID NERO
SICURO 68

3 INOX APPLIQUES
SICURO 68

3 NERO APPLIQUES
SICURO 68

4 INOX APPLIQUES
SICURO 68

APPLIQUE ON ONE SIDE OF THE DOOR

SICURO 68 RC3 44 dB

EXTERNAL INTERIOR DOOR

RC3 BURGLAR-RESISTANT

NEW

APPLIQUE ON OTHER SIDE OF THE DOOR: AT EXTRA COST



44 dB
SOUND
INSULATION

POSSIBILITY
OF SHORTENING
7 cm

4,5 to 7 cm **SHORTENING**
for an additional charge



LEAF THICKNESS:

68 mm



LEAF WIDTH:

80N
90 cm



5 INOX APPLIQUES
SICURO 68

4 NERO APPLIQUES
SICURO 68

MODELS WITH YOUR CHOICE OF INOX OR NERO APPLIQUES



5 NERO APPLIQUES
SICURO 68



6 INOX APPLIQUES
SICURO 68



6 NERO APPLIQUES
SICURO 68



7 INOX APPLIQUES
SICURO 68



7 NERO APPLIQUES
SICURO 68

APPLIQUE ON ONE SIDE OF THE DOOR

EQUIPMENT

STANDARD



GRANDE PLUS

SINGLE-LEAF FLAT DOOR

RC3 BURGLAR-RESISTANT

GRANDE PLUS (68 mm)

TECHNICAL DATA OF THE DOOR LEAF

LEAF	weight of a solid leaf in kg for 90 cm	41
	thickness in mm	68 ± 1
	filling	polystyrene
	leaf thickness in mm	0,7
	type of coating	wood-like
	anti-balance bolts	3 pcs.
	rebate (rabbet)	4-sided
	rebate thickness in mm	19
	groove thickness in mm	49
	thermal transmission coefficient (with metal frame)	solid U=1,1 W/(m²·K) glazed U=1,4 W/(m²·K)
HINGES	type	tri-partite
	coating	white zinc
	hinge class	7
	number of hinges	3
LOCK	multipoint, for a patented insert	

GRANDE PLUS (68 mm)

Size	Clear opening width (cm)	Clear opening height (cm)	Door width with frame (cm)	Door height with frame (cm)	Width of wall opening (cm)	Height of wall opening (cm)
90	90	200	100	207	102	208

dimensions for ENERGO and metal frame

90	90,5	200,5	102,5	208,5	104,5	209,5
----	------	-------	-------	-------	-------	-------

dimensions for TERMO frame

LEAF THICKNESS: 68 mm

LEAF WIDTH: 90 cm

44 dB
SOUND INSULATION

1,0 W/(m²·K)
HEAT INDEX

NOTE
The sound insulation and thermal transmittance coefficients apply to solid doors in a set with a timber-aluminium frame (the so-called warm frame - ENERGO).

POSSIBILITY OF SHORTENING
7 cm

45 to 7 cm **SHORTENING**
for an additional charge



SOLID PLUS

DARIO PLUS

DARIO NERO PLUS

DARIO UNO PLUS

PAOLO PLUS

RC3 - at extra cost

EQUIPMENT

1,1 W/(m²·K)
HEAT INDEX (solid)



1,4 W/(m²·K)
HEAT INDEX (glazed)



STANDARD



OPTIONALLY WITH HARDWARE


HARDWARE




3D HINGE



TONGUE ADJUSTMENT



SECTION OF THERMO FRAME



ALUMINIUM THRESHOLD WITH THERMAL INSERT



AT EXTRA CHARGE

RECOMMENDED PRODUCTS

TERMO Frame



68 mm TERMO aluminium frame, filled with insulating material, covered with PVC veneer in the same colour as the leaf, 3D hinge, thermal threshold.

TERMO Frame
at extra cost

AVAILABLE COLOURS



HINGE COVERS


HARDWARE




TRIPLE HINGE



HOOK WITH TONGUE ADJUSTMENT



SECTION OF ENERGO FRAME



ENERGO THRESHOLD WITH THERMAL INSERT



AT EXTRA CHARGE

RECOMMENDED PRODUCTS


ENERGO Frame



The ENERGO 68 mm timber/aluminium frame is made of glued pine, covered with an aluminium section veneered with PVC veneer in the same colour as the leaf, triple hinge and a threshold with a thermal insert.

ENERGO Frame
at extra cost

AVAILABLE COLOURS

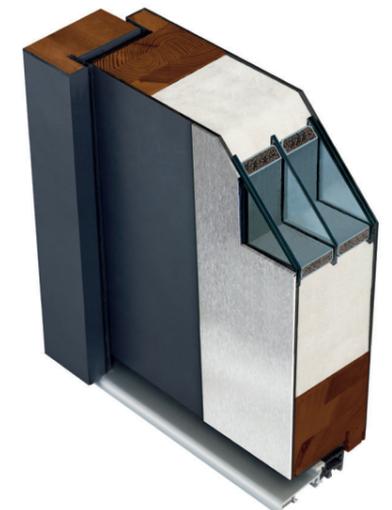

CROSS-SECTION OF THE LEAF WITH THE ENERGO FRAME

GRANDE PLUS

SINGLE-LEAF FLAT DOOR

RC3 BURGLAR-RESISTANT

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

DOORS WITH INCREASED RESISTANCE TO BURGLARY RC3 IN ACCORDANCE WITH STANDARD PN-EN1627:2012. APPLIES TO SOLID DOORS WITH METAL FRAME OPENING INWARDS USING FITTINGS (HANDLE, INSERT) INTENDED FOR THE RESPECTIVE CLASS.



4,5 to 7 cm **SHORTENING** for an additional charge



TERMO Frame at extra cost



ENERGO Frame at extra cost



F R A M E	F R A M E
TERMO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS



LEAF THICKNESS:

68 mm



LEAF WIDTH:

90 cm

MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM



PAOLO UNO PLUS



FABIO PLUS



FABIO UNO PLUS



RAFFAELLO PLUS



RAFFAELLO UNO PLUS



ANTONIO PLUS



MARCELLO PLUS



MARCELLO NERO PLUS



MARCELLO UNO PLUS



ALFREDO PLUS

shortening is not possible



ALFREDO NERO PLUS



IVO PLUS



IVO UNO PLUS




MATTEO PLUS



MATTEO UNO PLUS



ANGELO PLUS

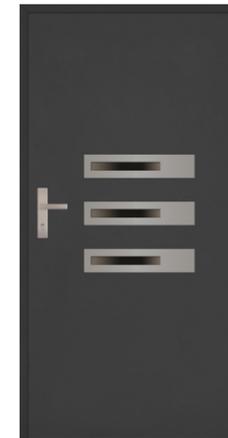

ARMANDO PLUS



LUCIANO UNO PLUS



VALENTINO PLUS



VALENTINO UNO PLUS



LEONARDO PLUS



SERGIO PLUS



SERGIO UNO PLUS



MARIO PLUS



RINO PLUS

GRANDE PLUS

SINGLE-LEAF FLAT DOOR

RC3 BURGLAR-RESISTANT

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST



RINO NERO PLUS



POSSIBILITY OF SHORTENING
7 cm
4,5 to 7 cm **SHORTENING**
for an additional charge



ALUMINIUM FRAME
TERMO Frame
at extra cost



WARM FRAME
ENERGO Frame
at extra cost

F R A M E	F R A M E
TERMO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS



LEAF THICKNESS:

68 mm



LEAF WIDTH:

90 cm



DIEGO PLUS



RICARDO PLUS

GRANDE 68, GRANDE 68 FLAT

RC2 BURGLAR-RESISTANT

GRANDE 68, GRANDE 68 FLAT (68mm)

TECHNICAL DATA OF THE DOOR LEAF

LEAF	weight of a solid leaf in kg for 90 cm	26,5 - 28,5
	thickness in mm	68 ± 1
	filling	polystyrene
	leaf thickness in mm	0,5 - 0,7
	type of coating	wood-like
	anti-balance bolts	3 pcs.
	rebate (rabbet)	4-sided
	rebate thickness in mm	15
	groove thickness in mm	53
	thermal transmission coefficient (with metal frame)	solid U=1,1 W/(m²·K) glazed U=1,4 W/(m²·K)
HINGES	type	tri-partite
	coating	white zinc
	hinge class	7
	number of hinges	3
LOCKS	basic 3-bolt	for a patent cylinder
	additional 3-bolt	for a patent cylinder



LEAF THICKNESS:

68 mm



WIDTH OF THE LEAF
depending on the collection selected:

80N,
90, 100 cm



29 dB
SOUND INSULATION



1,0 W/(m²·K)
HEAT INDEX (solid)

NOTE

The sound insulation and thermal transmittance coefficients apply to solid doors in a set with a timber-aluminium frame (the so-called warm frame - ENERGO).



POSSIBILITY OF SHORTENING
7 cm

4,5 to 7 cm **SHORTENING**
for an additional charge

GRANDE 68, GRANDE 68 FLAT (68 mm)

Size	Clear opening width (cm)	Clear opening height (cm)	Door width with frame (cm)	Door height with frame (cm)	Width of wall opening (cm)	Height of wall opening (cm)
80N	78	198	88	205	90	206
90	90	200	100	207	102	208
100	100	200	110	207	112	208

dimensions for ENERGO and metal frame

80N	78,5	198,5	90,5	206,5	92,5	207,5
90	90,5	200,5	102,5	208,5	104,5	209,5
100	100,5	200,5	112,5	208,5	114,5	209,5

dimensions for TERMO frame

MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM



ENRICO PLUS



LORENZO PLUS



AUGUSTO UNO PLUS



CARLO NERO PLUS



ALBERTO PLUS

EQUIPMENT

1,1 W/(m²K)
HEAT INDEX
(solid)



1,4 W/(m²K)
HEAT INDEX
(glazed)



STANDARD



HARDWARE

1,1 W/(m²K)
HEAT INDEX
(solid)



1,2 W/(m²K)
HEAT INDEX
(glazed)



AT EXTRA CHARGE

RECOMMENDED PRODUCTS

TERMO Frame

ALUMINIUM FRAME



68 mm TERMO aluminium frame, filled with insulating material, covered with PVC veneer in the same colour as the leaf, 3D hinge, thermal threshold.

TERMO Frame
at extra cost

AVAILABLE COLOURS



GOLD OAK

WALNUT




ANTHRACITE

WHITE



WINCHESTER


BLACK




3D HINGE



TONGUE ADJUSTMENT



SECTION OF THERMO FRAME



ALUMINIUM THRESHOLD WITH THERMAL INSERT



HINGE COVERS

HARDWARE

1,0 W/(m²K)
HEAT INDEX
(solid)


1,3 W/(m²K)
HEAT INDEX
(glazed)




TRIPLE HINGE



HOOK WITH TONGUE
ADJUSTMENT



SECTION OF ENERGO
FRAME



ENERGO THRESHOLD
WITH THERMAL
INSERT



AT EXTRA CHARGE

RECOMMENDED PRODUCTS

ENERGO Frame



The ENERGO 68 mm timber/aluminium frame is made of glued pine, covered with an aluminium section veneered with PVC veneer in the same colour as the leaf, triple hinge and a threshold with a thermal insert.

ENERGO Frame at extra cost

AVAILABLE COLOURS



ANTHRACITE WHITE



CROSS-SECTION OF THE
LEAF WITH THE ENERGO
FRAME

GRANDE 68

SINGLE-LEAF EMBOSSED DOOR

RC2 BURGLAR-RESISTANT

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

DOORS WITH INCREASED BURGLARY RESISTANCE RC2, ACCORDING TO PN-EN1627:2012 APPLIES TO SOLID DOORS WITH METAL FRAME OPENING OUTWARDS USING FITTINGS (HANDLE, ESCUTCHEON, INSERT) INTENDED FOR A GIVEN CLASS.



4,5 to 7 cm **SHORTENING**
for an additional charge



GOLD OAK WALNUT ANTHRACITE WHITE

FRAME	FRAME
TERMO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS

LEAF THICKNESS: 68 mm

LEAF WIDTH: 80N, 90, 100 cm

SHALLOW EMBOSSED
DEEPLY EMBOSSED



W16 SOLID 68

DARIO 68

DARIO NERO 68

DARIO UNO 68

DARIO UNO NERO 68

RC2 - at extra cost



RAFFAELLO 68

RAFFAELLO UNO 68

PAOLO 68

PAOLO UNO 68

LEONARDO 68



ANTONIO 68



FABIO 68



FABIO NERO 68



FABIO UNO 68



ANGELO 68

GRANDE 68 FLAT

SINGLE-LEAF FLAT DOOR

RC2 BURGLAR-RESISTANT

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

DOORS WITH INCREASED BURGLARY RESISTANCE RC2, ACCORDING TO PN-EN1627:2012. APPLIES TO SOLID DOORS WITH METAL FRAME OPENING OUTWARDS USING FITTINGS (HANDLE, ESCUTCHEON, INSERT) INTENDED FOR A GIVEN CLASS.



4,5 to 7 cm **SHORTENING** for an additional charge



WARM FRAME at extra cost



ALUMINIUM FRAME at extra cost



GOLD OAK



WALNUT



WHITE



ANTHRACITE



WINCHESTER

(not available with the ENERGO frame)

FRAME	FRAME
TERMO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS

LEAF THICKNESS: 68 mm

LEAF WIDTH: 80N, 90 cm

MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM



ARMANDO 68



ARMANDO NERO 68



RINO 68



DIEGO 68



DIEGO NERO 68



SOLID FLAT

RC2 - at extra cost



DARIO FLAT



DARIO UNO FLAT



PAOLO FLAT



PAOLO UNO FLAT



RICARDO 68



MARIO 68



LORENZO 68



LORENZO NERO 68



ENRICO 68



RAFFAELLO FLAT



RAFFAELLO UNO FLAT



FABIO FLAT




FABIO UNO FLAT



ANTONIO FLAT



VALENTINO FLAT

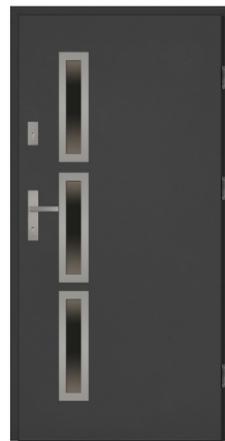

VALENTINO UNO FLAT



SERGIO FLAT

only available in size 90 cm



SERGIO UNO FLAT

only available in size 90 cm



MATTEO FLAT

only available in size 90 cm



MATTEO UNO FLAT

only available in size 90 cm



IVO FLAT

shortening is not possible / only available in size 90 cm



IVO UNO FLAT

shortening is not possible / only available in size 90 cm



ALFREDO NERO FLAT

shortening is not possible



MARCELLO FLAT

only available in size 90 cm



MARCELLO UNO NERO FLAT

only available in size 90 cm



DIEGO FLAT



LUCIANO NERO FLAT

only available in size 90 cm



MARIO FLAT



RINO FLAT

GRANDE 68 FLAT

SINGLE-LEAF FLAT DOOR

RC2 BURGLAR-RESISTANT

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST



POSSIBILITY OF SHORTENING 7 cm

4,5 to 7 cm **SHORTENING** for an additional charge

WARM FRAME

ENERGO Frame at extra cost

ALUMINIUM FRAME

TERMO Frame at extra cost

FRAME	FRAME
TERMO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS

LEAF THICKNESS: 68 mm

LEAF WIDTH: 80N, 90 cm



ARMANDO FLAT



LEONARDO FLAT

ANGELO FLAT

MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM



LORENZO PLUS FLAT

only available in size 90 cm



ENRICO PLUS FLAT

shortening is not possible / only available in size 90 cm



RICARDO FLAT



AUGUSTO UNO FLAT

shortening is not possible / only available in size 90 cm



CARLO NERO FLAT

MODERN, CLASSICO, J-TYTANIUM

MODERN, CLASSICO, J-TYTANIUM (56 mm)

TECHNICAL DATA OF THE DOOR LEAF

LEAF	weight of a solid leaf in kg for 80, 90 cm	20,22 - 25,28
	thickness in mm	56 ± 1
	filling	polystyrene
	leaf thickness in mm	0,5 - 0,7
	type of coating	wood-like
	anti-balance bolts	3 pcs.
	rebate (rabbet)	3-sided
	rebate thickness in mm	19
	groove thickness in mm	36
	thermal transmission coefficient (with metal frame)	solid U=1,5 W/(m ² ·K) glazed U=1,6 W/(m ² ·K)
HINGES	type	tri-partite
	coating	white zinc
	hinge class	7
	number of hinges for 80, 90	3
LOCKS	basic 3-bolt	for a patent cylinder
	additional 3-bolt	for a patent cylinder

MODERN, CLASSICO, J-TYTANIUM (56 mm)

Size	Clear opening width (cm)	Clear opening height (cm)	Door width with frame (cm)	Door height with frame (cm)	Width of wall opening (cm)	Height of wall opening (cm)
80	79,5	199	89,5	206	91,5	207
90	90	200	100	207	102	208
100	100	200	110	207	112	208

dimensions for ENERGO and metal frame

80	79,9	200	89,9	206,7	91	208
90	90,5	200,8	100,5	207,5	102,5	208,5
100	100,5	200,8	110,5	207,5	112,5	208,5

dimensions for SOLIDO frame

LEAF THICKNESS: **56 mm**

WIDTH OF THE LEAF depending on the collection selected:

80 cm
90, 100 cm

27 dB
SOUND INSULATION

1,4 W/(m²·K)
HEAT INDEX (solid)

NOTE

The sound insulation and thermal transmittance coefficients apply to solid doors in a set with a timber-aluminium frame (the so-called warm frame - ENERGO).

POSSIBILITY OF SHORTENING
7 cm


2,5 to 7 cm SHORTENING
for an additional charge

EQUIPMENT

1,5 W/(m²·K)
HEAT INDEX (solid)

1,6 W/(m²·K)
HEAT INDEX (glazed)

STANDARD

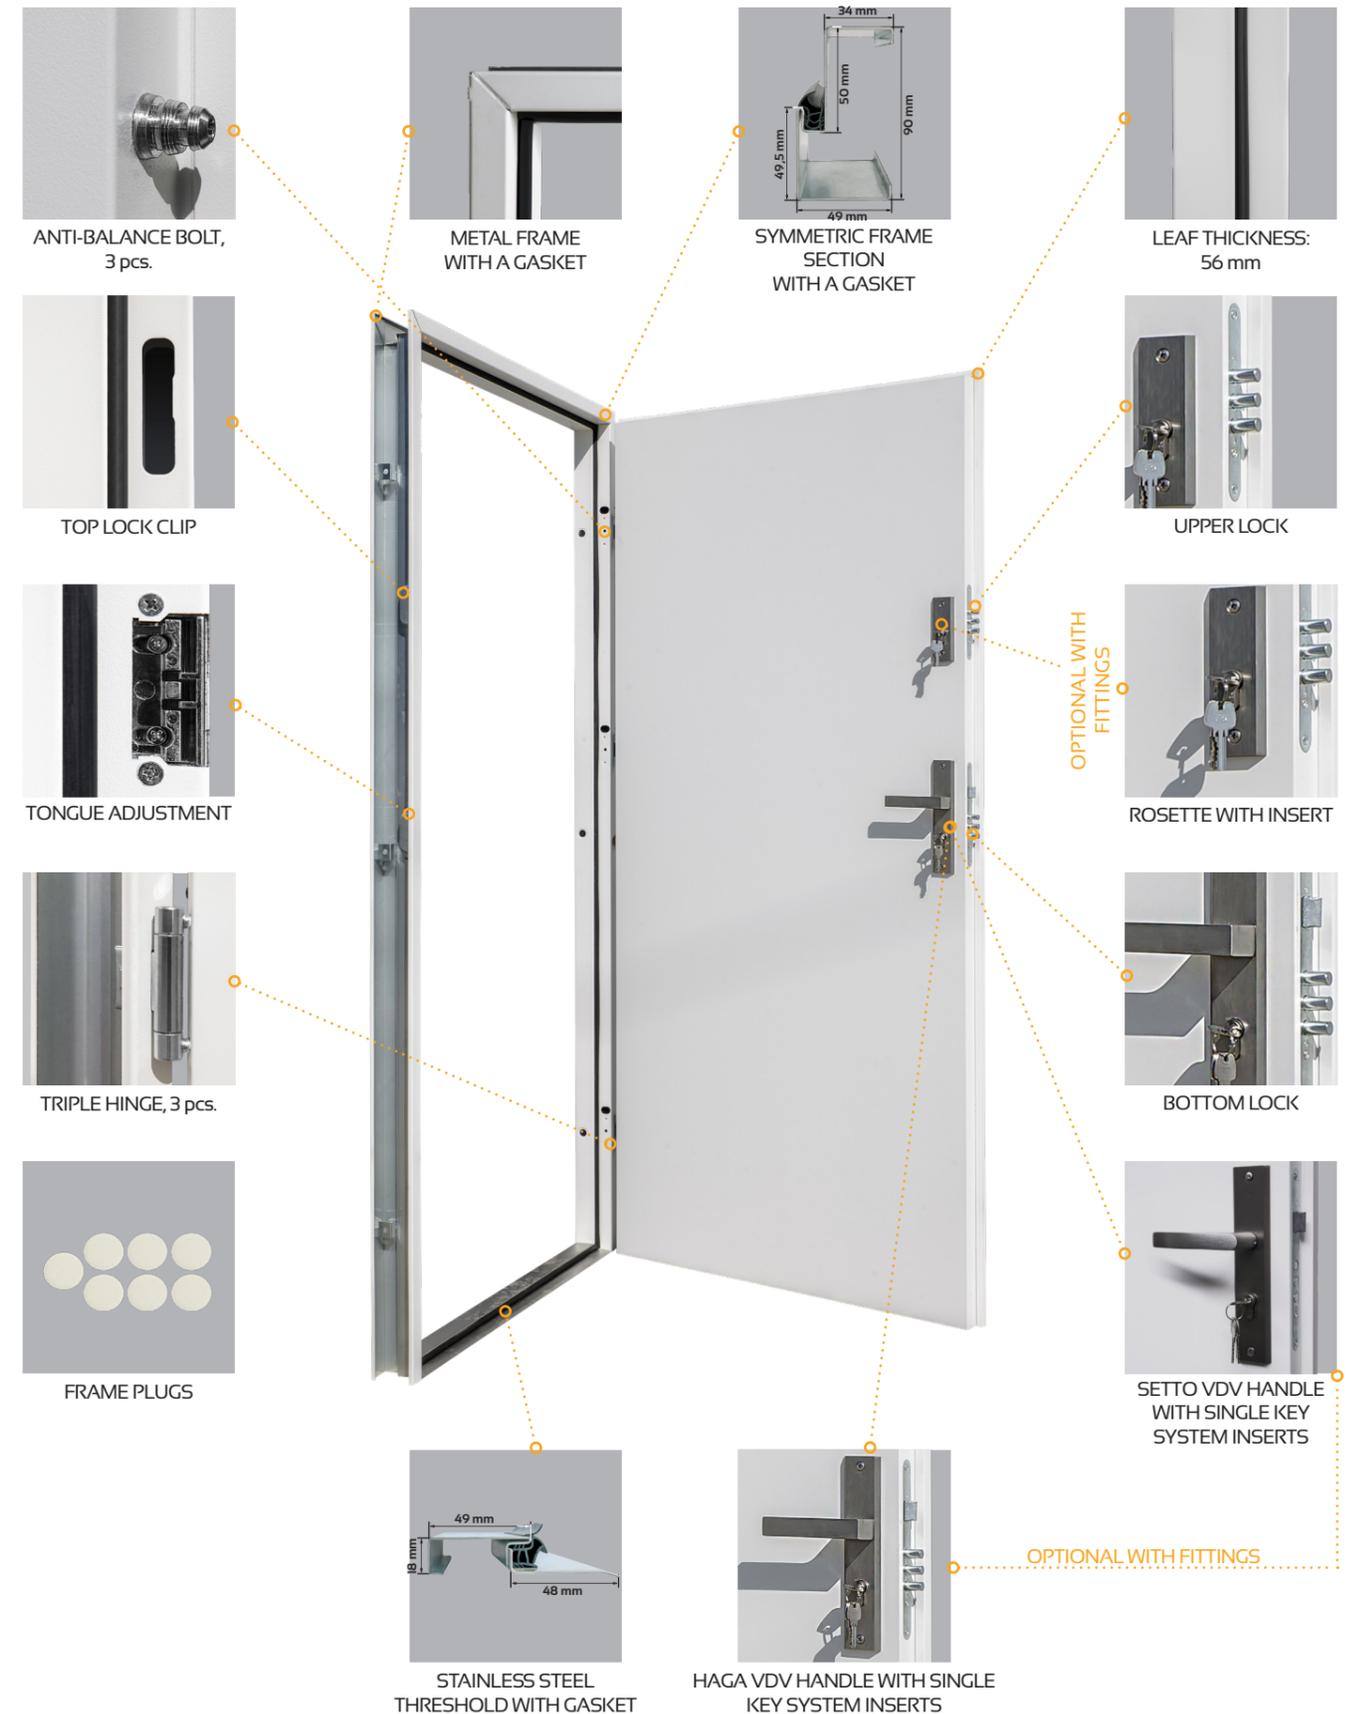

HARDWARE

1,2 W/(m²K)
HEAT INDEX
(solid)




1,5 W/(m²K)
HEAT INDEX
(glazed)




TRIPLE HINGE



TONGUE
ADJUSTMENT



SECTION OF SOLIDO
FRAME



ALUMINIUM
THRESHOLD WITH
THERMAL INSERT



AT EXTRA CHARGE

RECOMMENDED PRODUCTS

SOLIDO Frame

ALUMINIUM
FRAME



SOLIDO 56 mm aluminium frame is made of an aluminium section coated with PVC foil in the same colour as the leaf, triple hinge, aluminium threshold with thermal insert.

SOLIDO Frame
at extra cost

AVAILABLE COLOURS



GOLD OAK WALNUT



ANTHRACITE WHITE

HARDWARE


1,4 W/(m²K)
HEAT INDEX
(solid)




1,6 W/(m²K)
HEAT INDEX
(glazed)




TRIPLE HINGE



TONGUE
ADJUSTMENT



SECTION OF ENERGO
FRAME



STAINLESS STEEL
THRESHOLD



AT EXTRA CHARGE

RECOMMENDED PRODUCTS

ENERGO Frame

WARM
FRAME



The ENERGO 68 mm timber/aluminium frame is made of glued pine, covered with an aluminium section veneered with PVC veneer in the same colour as the leaf, triple hinge, threshold made of stainless steel.

ENERGO Frame
at extra cost

AVAILABLE COLOURS



GOLD OAK WALNUT



ANTHRACITE WHITE



CROSS-SECTION OF THE
LEAF WITH THE ENERGO
FRAME

MODERN

SINGLE-LEAF EMBOSSED DOOR

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

POSSIBILITY OF SHORTENING 7 cm

WARM FRAME

ALUMINIUM FRAME

25 to 7 cm **SHORTENING** for an additional charge

ENERGO Frame at extra cost

SOLIDO Frame at extra cost






FRAME		FRAME	
SOLIDO		ENERGO	
ALUMINIUM FRAME		WARM FRAME	
RECOMMENDED PRODUCTS		RECOMMENDED PRODUCTS	

LEAF THICKNESS: 56 mm

LEAF WIDTH: 90 cm



MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM

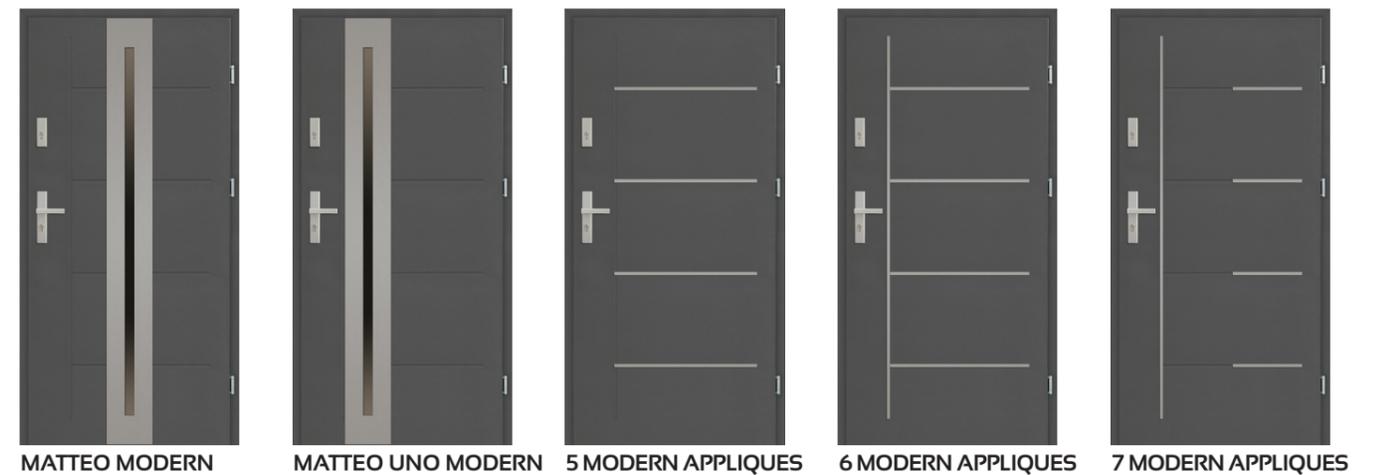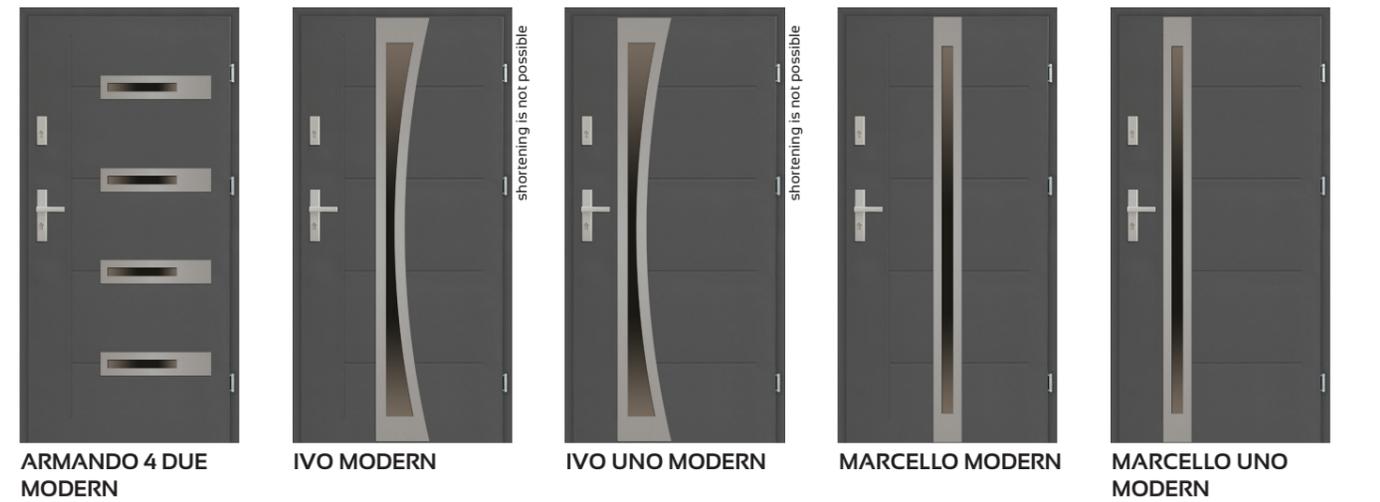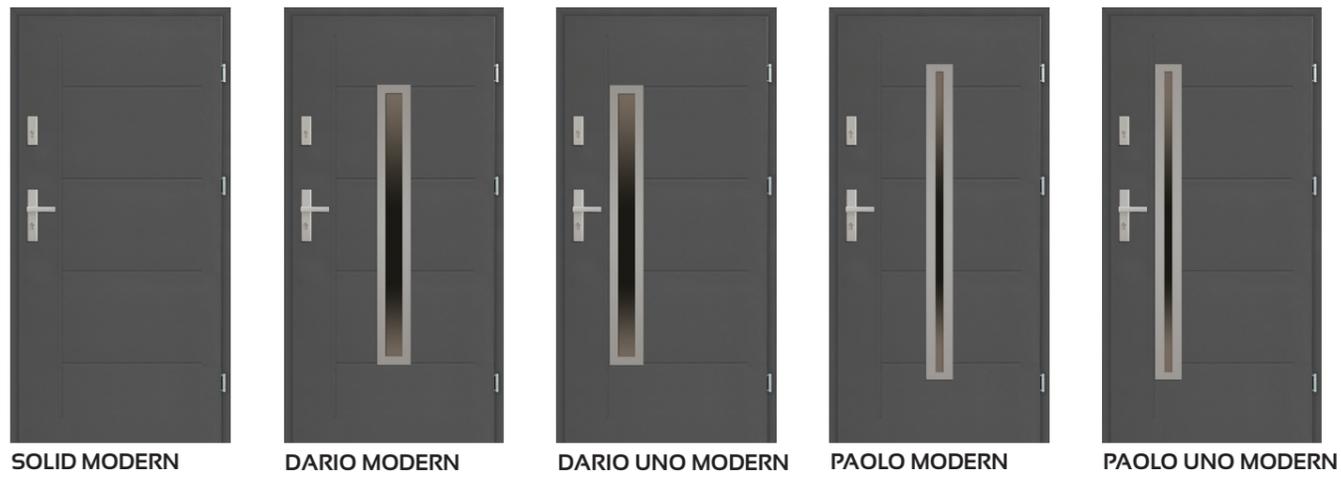

APPLIQUE ON BOTH SIDES OF THE DOOR

CLASSICO

SINGLE-LEAF FLAT DOOR

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

100 cm doors: at extra charge



25 to 7 cm **SHORTENING** for an additional charge

ENERGO Frame at extra cost

SOLIDO Frame at extra cost



FRAME	FRAME
SOLIDO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS

LEAF THICKNESS: 56 mm

LEAF WIDTH: 80, 90, 100 cm

SIZE: 100
NOT AVAILABLE IN WENGE OR MAHOGANY COLOUR

MODELS WITH **INOX** OR **NERO** GLASS FRAME TO CHOOSE FROM



CLASSICO

SINGLE-LEAF FLAT DOOR

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

100 cm doors: at extra charge



POSSIBILITY OF SHORTENING
7 cm

2,5 to 7 cm **SHORTENING**
for an additional charge

WARM FRAME

ENERGO Frame
at extra cost

ALUMINIUM FRAME

SOLIDO Frame
at extra cost

MARCELLO CLASSICO

FRAME		FRAME	
SOLIDO		ENERGO	
ALUMINIUM FRAME		WARM FRAME	
RECOMMENDED PRODUCTS		RECOMMENDED PRODUCTS	

LEAF THICKNESS: 56 mm

LEAF WIDTH: 80, 90, 100 cm



MARCELLO NERO CLASSICO



MARCELLO UNO CLASSICO



SERGIO CLASSICO



SERGIO UNO CLASSICO



ALFREDO CLASSICO



ALFREDO NERO CLASSICO



LORENZO CLASSICO



RICARDO CLASSICO



ANGELO 5 CLASSICO



MARIO CLASSICO



LORENZO PLUS CLASSICO



ENRICO CLASSICO

MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM



MATTEO CLASSICO



MATTEO NERO CLASSICO



MATTEO UNO CLASSICO



LUCIANO CLASSICO



LUCIANO UNO NERO CLASSICO



3 APPLIQUES CLASSICO



4 APPLIQUES CLASSICO



5 APPLIQUES CLASSICO



6 APPLIQUES CLASSICO



7 APPLIQUES CLASSICO

APPLIQUE ON BOTH SIDES OF THE DOOR

J-TYTANIUM

SINGLE-LEAF EMBOSSED DOOR

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

100 cm doors: at extra charge

 <p>POSSIBILITY OF SHORTENING 7 cm</p>	 <p>WARM FRAME</p>	 <p>ENERGO Frame at extra cost</p>	 <p>ALUMINIUM FRAME</p>	 <p>SOLIDO Frame at extra cost</p>
---	---	---	--	---

25 to 7 cm **SHORTENING** for an additional charge

ENERGO Frame at extra cost

SOLIDO Frame at extra cost



GOLD OAK WALNUT ANTHRACITE

<p>F R A M E</p> <p>SOLIDO</p> <p>ALUMINIUM FRAME</p> <p>RECOMMENDED PRODUCTS</p>	<p>F R A M E</p> <p>ENERGO</p> <p>WARM FRAME</p> <p>RECOMMENDED PRODUCTS</p>
--	---

LEAF THICKNESS: **56 mm**

LEAF WIDTH: **80, 90, 100 cm**

SIZE: 90
DEEPLY EMBOSSED

SIZE: 80, 100
SHALLOW EMBOSSED



FABIO FABIO UNO ANTONIO CARLO LEONARDO



SOLID PAOLO PAOLO NERO PAOLO UNO PAOLO UNO NERO



ANGELO ARMANDO ARMANDO NERO RINO DIEGO



DARIO DARIO NERO DARIO UNO RAFFAELLO RAFFAELLO UNO



DIEGO NERO ANGELO 5 ANGELO 5 NERO RICARDO LORENZO

J-TYTANIUM

SINGLE-LEAF EMBOSSED DOOR

GRAPHITE GLASS, BLACK GLASS, P4 CLASS GLASS: AT EXTRA COST

100 cm doors: at extra charge



POSSIBILITY OF SHORTENING
7 cm

2,5 to 7 cm **SHORTENING**
for an additional charge

WARM
FRAME

ENERGO Frame
at extra cost

ALUMINIUM
FRAME

SOLIDO Frame
at extra cost

FRAME	FRAME
SOLIDO	ENERGO
ALUMINIUM FRAME	WARM FRAME
RECOMMENDED PRODUCTS	RECOMMENDED PRODUCTS

LEAF THICKNESS: 56 mm

LEAF WIDTH: 80, 90, 100 cm



MARIO



ENRICO

LORENZO NERO

MODELS WITH INOX OR NERO GLASS FRAME TO CHOOSE FROM



2 APPLIQUES



3 APPLIQUES



4 APPLIQUES



5 APPLIQUES




6 APPLIQUES

APPLIQUE ON BOTH SIDES OF THE DOOR


GLAZING



BRONZE REFLEX GLASS
This is a lightly, subtly reflective glass („half-mirror“ effect) of brown shade (brown, tinted glass). Translucent on both sides.




MIRROR GLASS
At any time of day or night, from the outside and inside, the glass looks like a silver mirror.




MILKY GLASS
Milky glass is distinguished from other types of panes by the following characteristics: it is milky, opaque, it is not see-through and is easy to clean.



CLEAR GLASS
The glass giving most light, transparent on both sides. Available by special order.

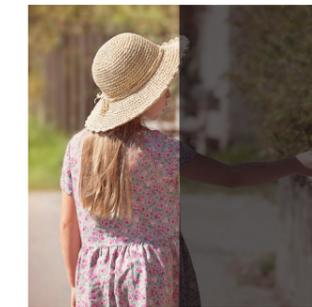

GRAPHITE GLASS
At any time of day or night, from the outside and inside, the glass has a graphite tint. Gently translucent. Available by special order and at an additional cost.

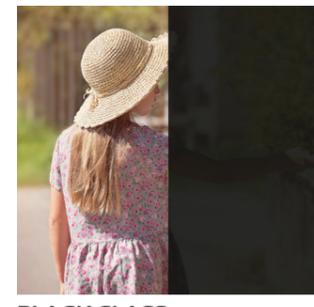


BLACK GLASS
At any time of day or night, from the outside and inside, the glass is black in colour. It is opaque on both sides. Available by special order and at an additional cost.




P4 GLASS (option available for all glazing versions)

The outer pane of 3 or 4 pane package, is made up of: 4 mm glass, 4 PVB film and 4 mm glass. Available by special order and at an additional cost.

COLOUR SCHEME



ANTHRACITE



WHITE



WALNUT



GOLD OAK



WINCHESTER



WENGE



MAHOGANY



BLACK

TERMO frame

FANLIGHT

TERMO / SOLIDO

SHORTE-NING IS NOT POSSIBLE  0,87 W/(m²K) HEAT INDEX 

FOR DOORS WITH THICKNESS OF 68 mm and 56 mm

FANLIGHT - made of aluminium profile



SIDE FANLIGHT WIDTH

20 - 100 cm

TOP FANLIGHT HEIGHT

20 - 70 cm

LEAF THICKNESS: 68 mm

TERMO from the following collections:
GRANDE PLUS, GRANDE 68, GRANDE 68 FLAT

LEAF THICKNESS: 56 mm

SOLIDO from the following collections:
MODERN, CLASSICO, J-TYANIUM



GLAZING AVAILABLE



- 1 ALUMINIUM PROFILE
- 2 FILLING WITH INSULATING MATERIAL
- 3 3 PANE PACKAGE


PRICE OF THE SET = selected door model with aluminium TERMO/SOLIDO frame
+ side fanlight 20, 30, 40, 50, 60, 70, 80, 90, 100 cm
+ top fanlight 20, 30, 40, 50, 60, 70 cm

Graphite glass - available at extra cost **NEW**
Black glass - available at extra cost
P4 glass - available at extra cost
Non-standard fanlight dimensions - at extra cost

COMPOSITION OF THE FANLIGHT: screws fixing the frame to the fanlight, expanding tape sealing the connection to the fanlight, gasket connecting the frame to the fanlight assembly kit, anchors or dowels depending on the type of fanlight.



OPTIONS:

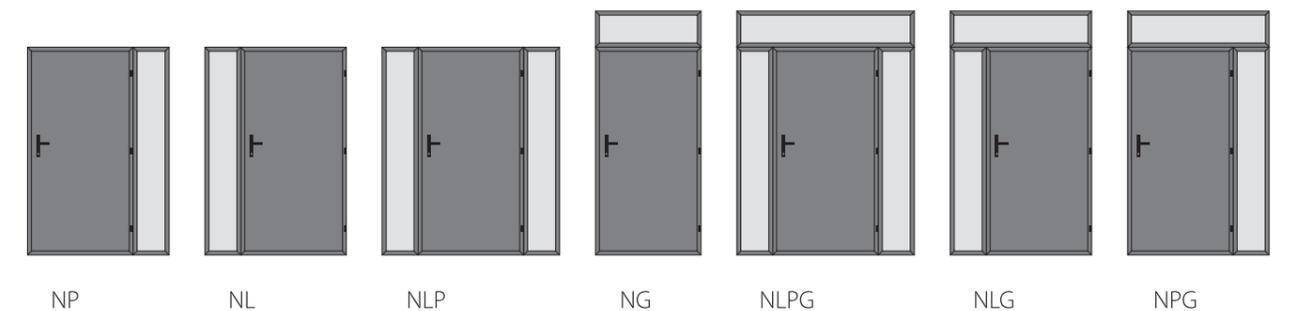

ECO-TECHNIC

TECHNICAL SYSTEM DOORS

ECO-TECHNIC (41 mm)

TECHNICAL DATA OF THE DOOR LEAF

LEAF	leaf weight in kg for 80, 90	15-17, 17-19
	thickness in mm	41 ± 1
	filling	polystyrene EPS70
	leaf thickness in mm	0,5
	type of coating	white, bronze, anthracite
	anti-balance bolts	-
	rebate (rabbet)	3-sided
	rebate thickness in mm	15
	groove thickness in mm	25
HINGES	type	pivot screwed
	coating	yellow zinc
	hinge class	3
	number of hinges	2
LOCKS	basic	for a patent cylinder
	additional 3-bolt	-

LEAF THICKNESS: 41 mm

LEAF WIDTH: 70, 80
90, 100 cm




2,5 to 7 cm **SHORTENING**
for an additional charge



ECO-TECHNIC (41 mm)

Size	Clear opening width (cm)	Clear opening height (cm)	Door width with frame (cm)	Door height with frame (cm)	Width of wall opening (cm)	Height of wall opening (cm)
70	69,4	201	77,8	205,2	74,5	202,5
80	79,4	201	87,8	205,2	84,5	202,5
90	89,4	201	97,8	205,2	94,5	202,5
100	99,4	201	107,8	205,2	104,5	202,5

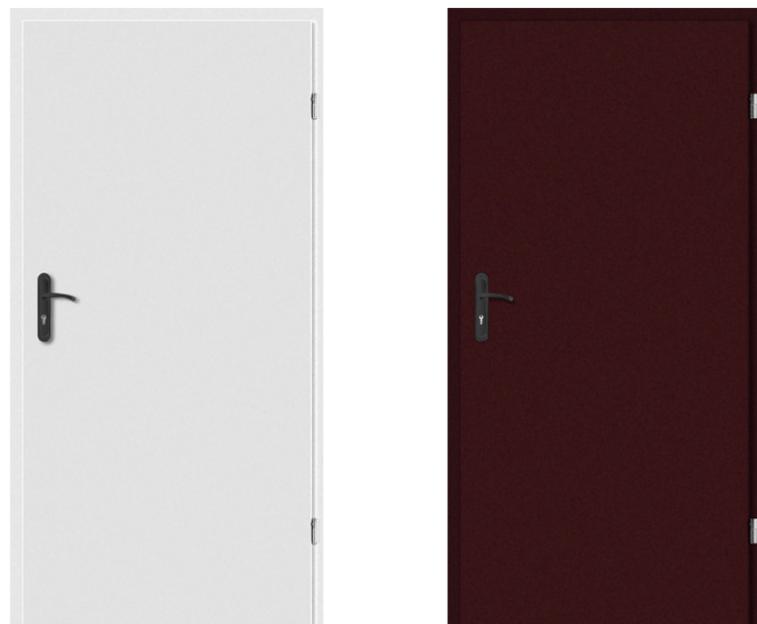

EQUIPMENT

STANDARD



HARDWARE

AT EXTRA CHARGE



DOOR HANDLES WITH 72 mm DISTANCE FOR DOORS FROM THE FOLLOWING COLLECTIONS:
GRANDE 68, GRANDE 68 FLAT, MODERN, CLASSICO, J-TYTANIUM, ECO-TECHNIC



HARDWARE

AT EXTRA CHARGE

DOOR HANDLES WITH 92 mm DISTANCE FOR DOORS FROM THE FOLLOWING COLLECTIONS: GRANDE PLUS

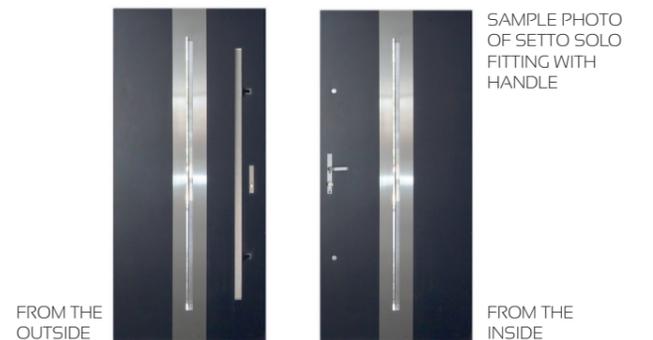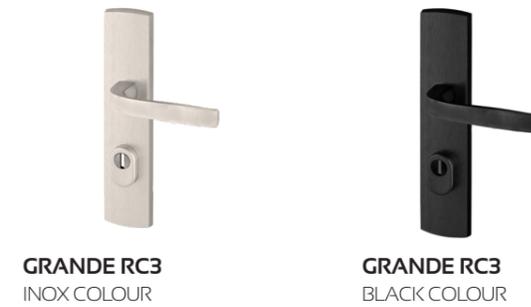

HARDWARE



26/43 INSERT
NICKEL, PATINA COLOUR
FOR DOOR THICKNESS 41 mm

30/50 INSERT
NICKEL, PATINA COLOUR
FOR DOOR THICKNESS 56 mm

40/50 INSERT
NICKEL, PATINA COLOUR
FOR DOOR THICKNESS 68 mm



30G/50 and 50G/30 INSERT-KNOB
NICKEL, PATINA COLOUR
FOR DOOR THICKNESS 56 mm

40G/50 and 50G/40 INSERT-KNOB
NICKEL, PATINA COLOUR
FOR DOOR THICKNESS 68 mm



DIGITAL DOOR VIEWER
3.2" LCD SCREEN - INFRARED CAMERA,
STORES UP TO 50 PHOTOS



SINGLE KEY SYSTEM
NICKEL, BRASS COLOUR
DOOR INSERT + DOOR INSERT-KNOB
FOR DOOR THICKNESS 56 mm
SIZE 30/50

SINGLE KEY SYSTEM
NICKEL, BRASS COLOUR
DOOR INSERT + DOOR INSERT-KNOB
FOR DOOR THICKNESS 68 mm
SIZE 40/50



SINGLE KEY SYSTEM CLASS C
NICKEL, BRASS COLOUR
DOOR INSERT + DOOR INSERT-KNOB
FOR DOOR THICKNESS 56 mm
SIZE 30/50

SINGLE KEY SYSTEM CLASS C
NICKEL, BRASS COLOUR
DOOR INSERT + DOOR INSERT-KNOB
FOR DOOR THICKNESS 68 mm
SIZE 40/50

Metal-Bud



VIEWFINDER
NICKEL, PATINA
COLOUR
LEAF
THICKNESS
56 mm

VIEWFINDER
NICKEL, PATINA
COLOUR
LEAF
THICKNESS
68 mm

AT EXTRA CHARGE



45/45 INSERT
NICKEL COLOUR
FOR DOOR THICKNESS 68 mm

45G/45 INSERT-KNOB
NICKEL COLOUR
FOR DOOR THICKNESS 68 mm



45/45 INSERT CLASS C
NICKEL COLOUR
FOR DOOR THICKNESS 68 mm

45G/45 INSERT-KNOB CLASS C
NICKEL COLOUR
FOR DOOR THICKNESS 68 mm

HARDWARE

AT EXTRA CHARGE



STRAIGHT HANDRAIL
BEVEL,
SIDE INSTALLATION



LENGTH 120 CM
INOX COLOUR

LENGTH 150 CM
INOX COLOUR

LENGTH 120 CM
BLACK COLOUR

LENGTH 150 CM
BLACK COLOUR



STRAIGHT ROUND HANDRAIL
BEVELLED,
SIDE FITTING



LENGTH 120 CM
INOX COLOUR

LENGTH 150 CM
INOX COLOUR

LENGTH 120 CM
BLACK COLOUR

LENGTH 150 CM
BLACK COLOUR



PROTECTION FOR THE LOWER PART OF THE DOOR
8 cm; 12,5 cm

(cannot be fitted on ALFREDO, IVO, LUCIANO, MATTEO, MARCELLO, SERGIO, LORENZO PLUS, ENRICO PLUS, AUGUSTO UNO models)



SILL PLATE

Dimensions:
• height 30 mm
• width 60 mm
• length 110 cm



BENT HANDRAIL
LENGTH 120 CM
INOX COLOUR



BENT HANDRAIL
LENGTH 120 CM
BLACK COLOUR




ELECTRIC STRIKE

AVAILABLE IN DOOR THICKNESSES OF
68 mm AND 56 mm



MAGNETIC SENSOR



ADDITIONAL CHARGE FOR A PUSH-BUTTON HANDLE 150 cm

an electric door opener must be purchased for the push-button handle

EXTENSION FOR TERMO DOORFRAME
(running metre)

2,5 CM
5 CM
10 CM

EXTENSION FOR SOLIDO DOORFRAME
(running metre)

2,5 CM
5 CM
10 CM

DRIP TRAY



STAINLESS STEEL CARE PRODUCT



www.setto.pl

This publication does not constitute an offer within the meaning of the legal regulations and is for informational purposes only. The manufacturer reserves the right to change and improve the products listed in this catalogue without prior notice and reserves the right to printing errors. Colours may differ from reality. There may be colour differences depending on the type of material (door frames, handles, stainless steel glass frames). All copyrights reserved. Complete and partial copying and publication of the catalogue on websites and other mass media is prohibited without the prior written permission of the manufacturer.

